

Fanvil | **LINKVIL**

Fanvil 2-wire Product Line

Building an Intelligent World of the Infinite Communication


2024



www.fanvil.com

How does Fanvil 2-wire system work


Traditional enterprise office networking

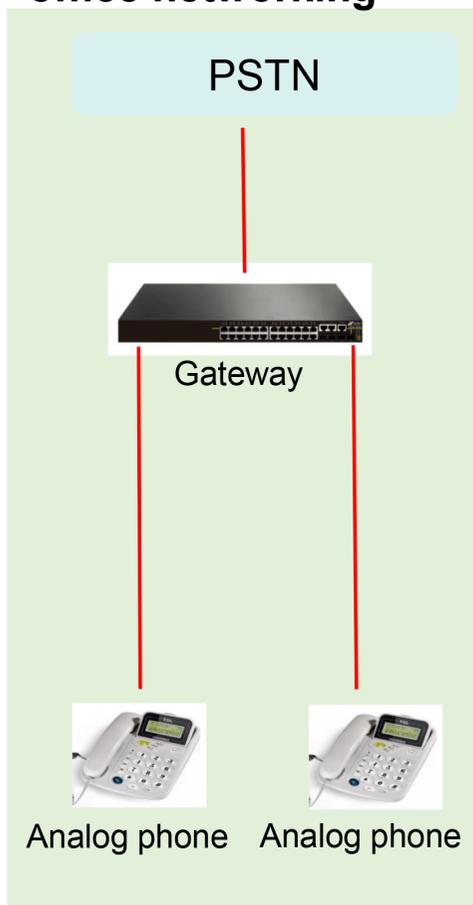


Change for new



Setting up a new IP phone network for office

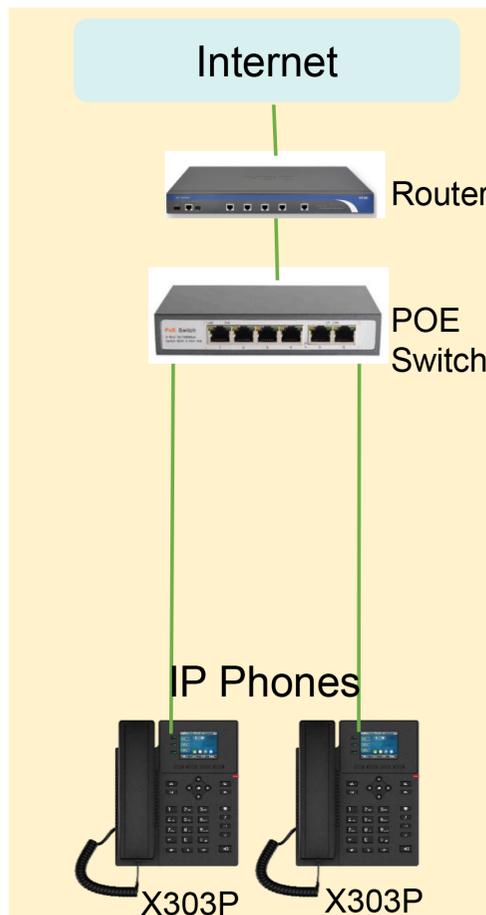

Networking with 2-wire

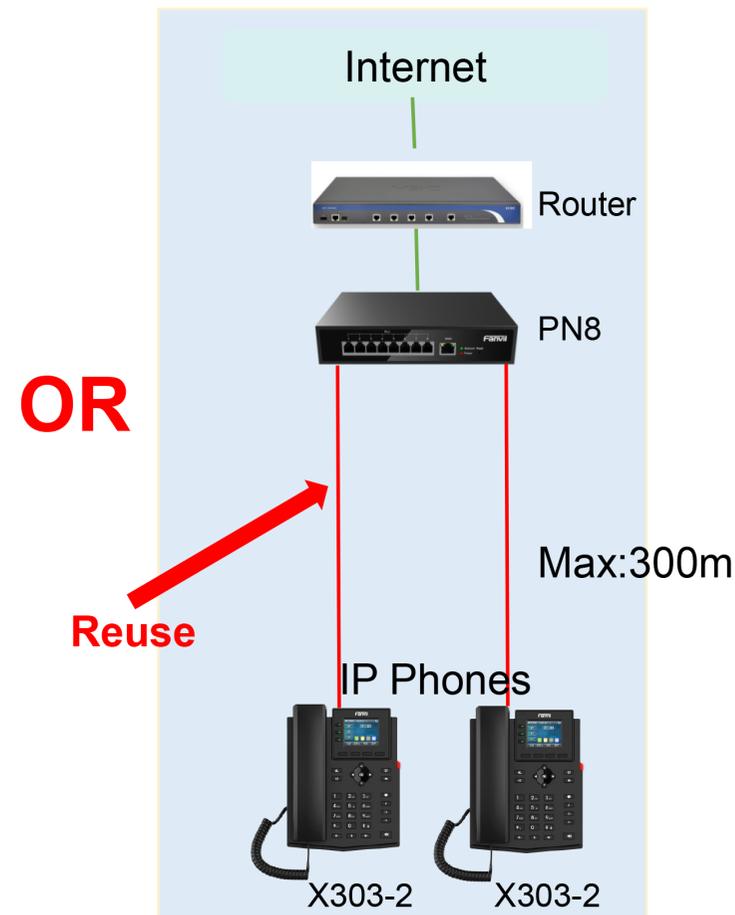

— 2 Wire
— Network Cable

Plug and play, reducing installation time and deployment costs

2-Wire Products

2-Wire Desk Phone



X303-2 Wire



H4-2 Wire

2-Wire Switch



PN8



PN1



PN24

* Samples will be ready in Q2, 2024

2-Wire Business IP Phone



2.4" Color Screen




4 SIP Lines



Desktop and Wall-mounted



X303-2 Wire



Dual-core Processor



Support 6-party Audio Conference

2-Wire Hotel IP Phone



H4-2 Wire



RJ11 Interface



Max 5 Programmable Service Dials



Slim Design

Highlight Features

H4-2 Wire



X303-2 Wire



Fanvil Unique Phones



Directly Connect to Network through RJ11 Port



Utilize Existing Wiring



Plug and Play, Reducing Installation Time and Deployment Costs



Integrate with Fanvil 2-wire Switch for Quick Network Setup

2-Wire Switch



Utilize Existing Wiring
(PSTN & RVV cable)



Plug and Play, Reducing
Deployment Costs




Cascade through Switch
Network Cables for **Stable**
Network Transmission



Seamlessly Integrate with
Cloud Management
/Conferencing Systems



Support Reliable Network and
Power Supply, **Maximum**
Transmission Distance: 300m

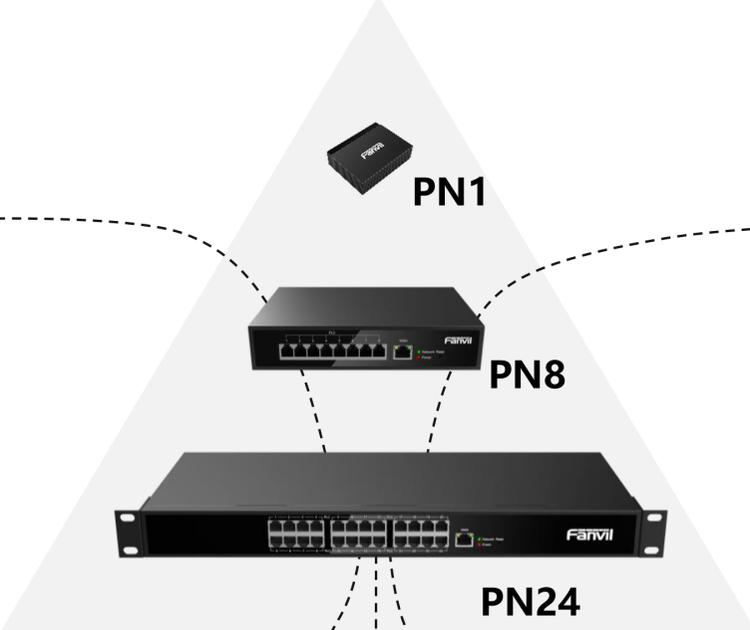

2-Wire Switch Comparison



Pic Spec									
Model	Fanvil PN24	Fanvil PN8	Fanvil PN1	Akuvox NS-2	2N 2 Wire (pair)	Hikvision DS-KAD704Y	Hikvision DS-KAD706Y	Hikvision DS-KAD706Y-S	Dnake 290A
Network Interface	1 RJ45	1 RJ45	1 RJ45	1 RJ45	2 RJ45	1 RJ45	1 RJ45	1 RJ45	2 RJ45
Network Speed	10/100Mbps	10/100Mbps	10/100Mbps	10/100Mbps	10/100Mbps	10/100Mbps	10/100Mbps	10/100Mbps	10/100Mbps
2-Wire Interface	24	8	1	6	2	6	8	8	8
Power Supply	54v.3a	54v.1.5A	TBD	48V or 24V	48 V / 0.84-1.3 A	24V	24V	24V	48V
Working Temperature	-20°C~50°C	-20°C~50°C	-20°C~50°C	-20°C~+50°C	-10 ~ 50°C	-10 °C ~ 55 °C	-10 °C ~ 55 °C	-10 °C ~ 55 °C	-40°C ~ +70°C
Material for Shell	Galvanized Steel	Galvanized Steel	Galvanized Steel	/	Aluminum	SECC	SECC	SECC	Plastic
Dimension	440x189.85x44mm	195x130x40mm	TBD	161x90x65mm	40x40x75mm	143.7x90x66mm	143.7x90x66mm	143.7x90x66mm	197x114x38mm
Weight	2530g	1100g	TBD	730g	120g	/	/	/	270g
Installation	Desktop & wall-mountable	Desktop & wall-mountable	Desktop & wall-mountable	Rail mounting	Rail mounting	Din rail mounting	Rail mounting	Rail mounting	Rail & screw fix mounting

Fanvil | **LINKVIL**

THANKS

LinkedIn @Fanvil

+86-755-2640-2199

YouTube @FanvilOfficial

www.fanvil.com

X @FanvilOfficial

@Fanvil

