

# Fanvil X303-2 Wire IP Phone




## Description

Fanvil X303-2 Wire IP Phone is an upgraded version of the original IP phone, featuring a brand-new power and network supply method using a 2-wire connection. This allows for complete reuse of old wiring while offering high-definition voice, a 2.4-inch color display, support for 4 SIP accounts, 2-wire power and network supply, multi-party conferencing, and other rich features. Additionally, it supports external EHS wireless headsets and other expansion functions, making it suitable for various enterprise application scenarios and providing an excellent user experience.

## Main Features

-  It connects via an RJ11 interface and supports 2-wire power and network supply
-  2.4-inch color display meets a variety of application needs
-  Support audio codec G.722 and Opus, HD voice on speakerphone and handset
-  Supports 6-party conferencing
-  Supports desktop and wall-mounted installation

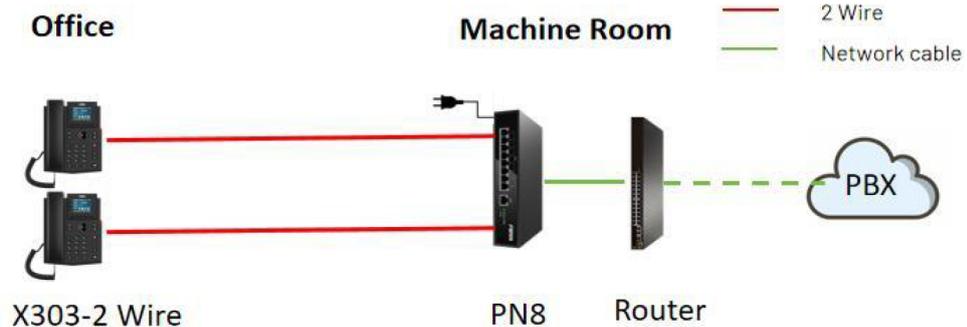

Fanvil Technology Co., LTD

Add: 10F, Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'An District, Shenzhen, China

Phone: 0755-26402199 E-mail: sales@fanvil.com Web : www.fanvil.com



## Specifications

<b>Scenario</b>	Office, Hospital, Apartment
<b>Screen/Keyboard</b>	2.4-inch color screen 320×204 4 Soft-Keys 9 Function keys (Hold/Transfer/Voicemail/Conference/Phonebook /MWI/Headset/Redial/Hands-free) 3 Line keys (with LED indicator light) 4 Navigation keys + 1 OK key 12 Standard phone digits keys 3 Volume control keys (Up/Down/Mute (Microphone))
<b>Body</b>	Plastic
<b>Color</b>	Black
<b>Status Light</b>	1 (Red)
<b>Interface</b>	Wire interface (6P2C RJ11 interface) Power interface RJ9 interface (Handset x1, Headset x1) Security Slot x1
<b>Power</b>	DC 12V/1A 2-Wire PoE Switch supply power
<b>Size</b>	Desktop Stand (45°): 169x203.6x172.7 mm Desktop Stand (50°): 169x194x181 mm Wall mountable: 169x113.4x207.6 mm
<b>Working Temperature</b>	0°C~+45°C
<b>Installation</b>	Desktop Wall mountable (Need to purchase accessories separately)

## Functional Capabilities

<b>Protocols</b>	SIP2.0 over UDP/TCP/TLS, RTP/RTCP/SRTP, STUN, DHCP, IPv6, LLDP, PPPoE, 802.1x, L2TP, OpenVPN, SNTP, FTP/TFTP, HTTP/HTTPS, TR-069, AES128 & AES256
<b>Video</b>	HD Voice Microphone/Speaker (Handset/Hands-free, 0 ~ 7KHz Frequency Response) Wideband ADC/DAC 16KHz Sampling Narrowband Codec: G.711a/u, G.723.1, G.726, G.729A/B, iLBC Wideband Codec: G.722, Opus Full-duplex Acoustic Echo Canceller (AEC) Voice Activity Detection (VAD) / Comfort Noise Generation (CNG) / Background Noise Estimation (BNE) / Noise Reduction (NR) / Automatic Gain Control (AGC) Packet Loss Concealment (PLC) Dynamic Adaptive Jitter Buffer DTMF: In-band, Out-of-Band (RFC2833/ SIP INFO) VQM voice quality monitoring



Fanvil Technology Co., LTD

Add: 10F, Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'An District, Shenzhen, China

Phone: 0755-26402199 E-mail: sales@fanvil.com Web : www.fanvil.com

<b>Network</b>	<p>IP Mode:IPv4/IPv6</p> <p>IP Configuration: Static IP / DHCP / PPPoE</p> <p>Network Access Control: 802.1x</p> <p>VPN: L2TP / OpenVPN</p> <p>VLAN</p> <p>LLDP</p> <p>QoS</p> <p>RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)</p>
<b>Phone Functions</b>	<p>Local Phonebook (1000 entries)</p> <p>Remote Phonebook (XML/LDAP, 1000 entries)</p> <p>Call logs (In/Out/Missed, 600 entries)</p> <p>Blocked List/Allowed List</p> <p>Screen saver</p> <p>Voice Message Waiting Indication (VMWI)</p> <p>Programmable DSS/Soft keys</p> <p>Network Time Synchronization</p> <p>Support Plantronics wireless headset (Through Plantronics APD-80 EHS Cable)</p> <p>Support Jabra wireless headset (Through Fanvil EHS20 EHS Cable)</p> <p>Support Recording (Through Server)</p> <p>Action URL / Active URI</p> <p>uaCSTA</p>
<b>Call Functions</b>	<p>Call out / Answer / Reject</p> <p>Mute / Unmute (Microphone)</p> <p>Call Hold / Resume</p> <p>Call Waiting</p> <p>Intercom</p> <p>Caller ID Display</p> <p>Speed Dial</p> <p>Anonymous Call (Hide Caller ID)</p> <p>Call Forward (Always/Busy/No Answer)</p> <p>Call Transfer (Attended/Unattended)</p> <p>Call Parking/Pick-up (Depending on server)</p> <p>Redial</p> <p>Do-Not-Disturb</p> <p>Auto-Answering</p> <p>Voice Message (With server)</p> <p>6-way Conference</p> <p>Hot Line</p> <p>Hot desking</p>
<b>Deployment Management</b>	<p>Auto-Provisioning via FTP/TFTP/HTTP/HTTPS/DHCP OPT66/SIP PNP/TR-069</p> <p>Web Management Portal</p> <p>Web-based Packet Dump</p> <p>Configuration Export / Import</p> <p>Phonebook Import/Export</p> <p>Firmware Upgrade</p> <p>Syslog</p>